

Meets the requirements of ASTM D 6164, Type I, Grade G


Features and Components

DynaLastic 180 is used as a polyester-reinforced mineral-surfaced cap or flashing sheet in a variety of multi-ply roofing systems.

Ceramic-Coated Roofing Granules: Specifically engineered for optimal embedment in the SBS-blend sheet. The ceramic coating promotes excellent long-term adhesion.

High-Quality SBS Rubber and Asphalt Blend: Lends elasticity and flexibility to the sheet. The elongation and recovery properties allow the product to easily accommodate the continual expansion and contraction experienced on all roofs.

Polyester-Reinforcement Mat: Provides excellent tensile strength, toughness, and puncture resistance and can accommodate stresses created by typical roof top expansion and contraction forces.

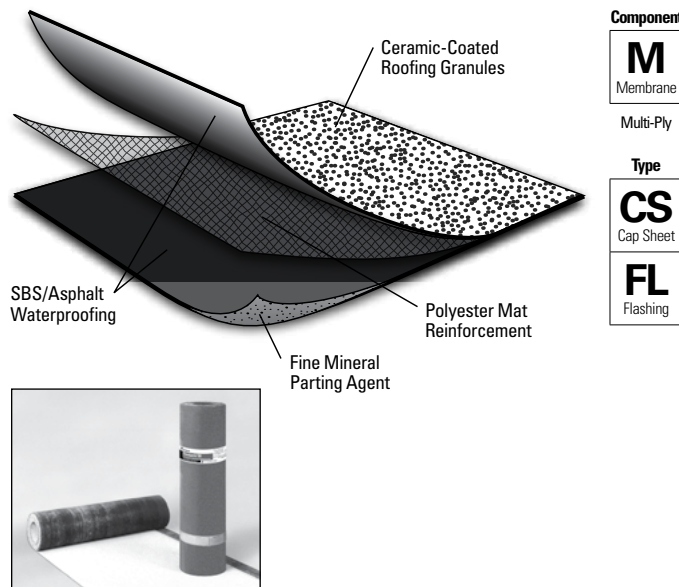

System Compatibility This product may be used as a component in the following systems. Please reference product application for specific installation methods and information.

Multi-Ply	BUR		APP		SBS			
	HA	CA	CA	HW	HA	CA	HW	SA
Compatible with the selected Multi-Ply systems above								

Single Ply	TPO		PVC		EPDM		
	MF	FA	MF	FA	MF	FA	BA
Do not use with Single Ply systems							

Key: HA = Hot Applied CA = Cold Applied HW = Heat Weldable SA = Self Adhered MF = Mechanically Fastened FA = Fully Adhered BA = Ballasted

Energy and the Environment

Test	Initial	3-Year Aged
Reflectivity* (ASTM C 1549)	0.26	0.27
Emissivity* (ASTM C 1371)	0.87	0.84
Solar Reflectance Index* (SRI) - E 1980	25	25
Pre-Consumer Recycled Content	0%	
Post-Consumer Recycled Content	0%	

*Standard White Granule only

Peak Advantage® Guarantee Information

Systems	Guarantee Term
When used in most 2-5 ply JM SBS systems.*	Up to 30 years

*Contact JM Technical Services for specific system requirements or guarantee terms.

Codes and Approvals



Product Application



Hot Asphalt Cold Applied

- May be installed in Type IV asphalt or in an approved JM adhesive
- Laps may be installed using heat-welding techniques
- Refer to JM SBS modified bitumen specifications and detail drawings for application and slope information

Packaging and Dimensions

Roll Coverage*	95.8 ft ² (8.9 m ²)
Roll Length	32' 10" (10.01 m)
Roll Width	39 3/8" (1 m)
Roll Weight	101 lb (46 kg)
Rolls per Pallet	20
Pallet Weight	2,198 lb (997 kg)
Pallets per Truck**	22

*Assumes a 4" side lap **Assumes 48' flatbed truck.

Meets the requirements of ASTM D 6164, Type I, Grade G

Tested Physical Properties

Physical Properties		ASTM Test Method	Standard for ASTM D 6164, Type I, Grade G (Min.)	DynaLastic 180	
				MD*	XMD**
Strength	Tensile Tear	D 5147	55 lbf (245 N)	125 lbf (556 N)	90 lbf (400 N)
	Peak Load at 0°F (-18°C)	D 5147	70 lbf/in (12 kN/m)	110 lbf/in (19.3 kN/m)	90 lbf/in (15.8 kN/m)
	Peak Load at 73.4°F (23°C)	D 5147	50 lbf/in (8.8 kN/m)	80 lbf/in (14.0 kN/m)	60 lbf/in (10.5 kN/m)
Longevity	Low Temp. Flexibility	Unconditioned	D 5147	0°F (-18°C)	-20°F (-29°C)
		90-Day Heat Conditioned	D 5147	0°F (-18°C)	-20°F (-29°C)
	Compound Stability	D 5147	215°F (102°C)	250°F (121°C)	
	Granule Loss	D 4977	2 g (0.07 oz)	0.7 g (0.02 oz)	
	Thickness	D 5147	130 mil (3.3 mm)	157 mil (4.0 mm)	
	Selvage Edge Thickness	D 5147	N/A	119 mil (3.0 mm)	
	Elongation at Peak Load at 0°F (-18°C)	D 5147	20%	35%	40%
	Elongation at Peak Load at 73.4°F (23°C)	D 5147	35%	55%	60%
	Ultimate Elongation at 73.4°F (23°C)	D 5147	38%	70%	80%
Aged Performance	90-Day Heat-Conditioned Peak Load at 0°F (-18°C)	D 5147	70 lbf/in (12 kN/m)	110 lbf/in (19.3 kN/m)	90 lbf/in (15.8 kN/m)
	90-Day Heat-Conditioned Elongation at Peak Load at 0°F (-18°C)	D 5147	20%	25%	25%
	90-Day Heat-Conditioned Peak Load at 73.4°F (23°C)	D 5147	50 lbf/in (8.8 kN/m)	85 lbf/in (14.9 kN/m)	65 lbf/in (11.4 kN/m)
	90-Day Heat-Conditioned Elongation at Peak Load at 73.4°F (23°C)	D 5147	35%	35%	45%
	90-Day Heat-Conditioned Ultimate Elongation at 73.4°F (23°C)	D 5147	38%	45%	45%
Installation	Dimensional Stability	D 5147	1.0%	0.2%	0.1%
	Net Mass per Unit Area	D 146	75 lb/100 ft² (34 kg/9.29 m²)	93 lb/100 ft² (42 kg/9.29 m²)	
	Roll Weight	D 146	N/A	101 lb (46 kg)	

*MD = Machine Direction

**XMD = Cross-Machine Direction

Note: All data represents tested values.