

Meets or exceeds the criteria for ASTM D 6221, Type I


Features and Components

DynaFlex is used as a fiber glass/polyester reinforced cap flashing membrane in a variety of multi-ply roofing systems.

Ceramic-Coated Roofing Granules: Specifically engineered for optimal embedment in the SBS-blend sheet. The ceramic coating promotes excellent long-term adhesion.

High-Quality SBS Rubber and Asphalt Blend: Lends elasticity and flexibility to the sheet. The elongation and recovery properties allow the product to easily accommodate the continual expansion and contraction experienced on all roofs.

Fiber Glass/Polyester Reinforcement Mat: Combines the excellent tensile strength, toughness and puncture resistance of a polyester mat with the dimensional stability and lay-flat characteristics of fiber glass.

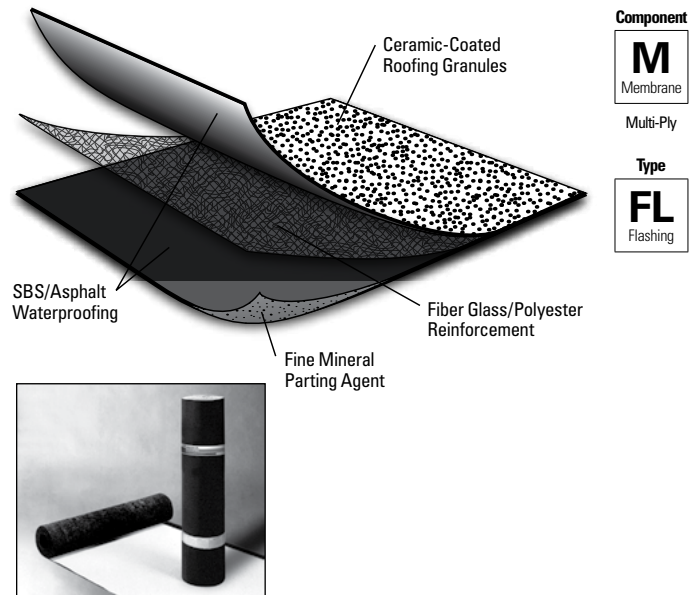

System Compatibility *This product may be used as a component in the following systems. Please reference product application for specific installation methods and information.*

Multi-Ply	BUR		APP		SBS			
	HA	CA	CA	HW	HA	CA	HW	SA
<i>Compatible with the selected Multi-Ply systems above</i>								

Single Ply	TPO		PVC		EPDM		
	MF	FA	MF	FA	MF	FA	BA
<i>Do not use with Single Ply systems</i>							

Key: HA = Hot Applied CA = Cold Applied HW = Heat Weldable SA = Self Adhered MF = Mechanically Fastened FA = Fully Adhered BA = Ballasted

Energy and the Environment

Test	Initial	3-Year Aged
Reflectivity* (ASTM C 1549)	0.26	0.27
Emissivity* (ASTM C 1371)	0.87	0.84
Solar Reflectance Index* (SRI) - E 1980	25	25
Pre-Consumer Recycled Content	0%	
Post-Consumer Recycled Content	0%	

*Standard White Granule only

Peak Advantage® Guarantee Information

Systems	Guarantee Term
When used in most 2-5 ply JM SBS systems.*	Up to 30 years

*Contact JM Technical Services for specific system requirements or guarantee terms.

Codes and Approvals



Product Application



- May be installed in Type IV asphalt or in an approved JM adhesive
- Laps may be installed using heat-welding techniques
- Refer to JM SBS modified bitumen specifications and detail drawings for application and slope information

Packaging and Dimensions

Roll Coverage*	75 ft ² (6.97 m ²)
Roll Length	25' (7.62 m)
Roll Width	36" (0.91 m)
Roll Weight	81 lb (36.7 kg)
Rolls per Pallet	20
Pallet Weight	1,750 lb (794 kg)
Pallets per Truck**	22

*Assumes a 4" side lap **Assumes 48' flatbed truck.

Meets or exceeds the criteria for ASTM D 6221, Type I

Tested Physical Properties

Physical Properties		ASTM Test Method	Standard for ASTM D 6221, Type I (Min.)	DynaFlex	
				MD*	XMD**
Strength	Peak Tear Resistance	D 5601	1.8 lbf (8 N)	30 lbf (133 N)	46 lbf (205 N)
	Peak Load at 73.4°F (23°C)	D 2523	55 lbf (24.9 kgf)	127 lbf (58 kgf)	132 lbf (60 kgf)
Longevity	Low Temp. Flexibility	D 5683	No Cracks @ 40°F (4.4°C)	No Cracks	
	Thickness	D 751	130 mil. (3.3 mm)	152 mil (3.9 mm)	
Installation	Dimensional Stability	D 5147	N/A	0.2%	0.2%
	Net Mass per Unit Area	D 228	70 lb/100 ft ² (32 kg/9.29 m ²)	104 lb/100 ft ² (47.2 kg/9.29 m ²)	
	Roll Weight	D 146	N/A	81 lb (36.7 kg)	

*MD = Machine Direction

**XMD = Cross-Machine Direction

Note: Material tested in accordance with ASTM D 5147 Standard Test Methods for Sampling and Testing Modified Bituminous Sheet Materials.