


Features and Components

Preformed, skid-resistant roof protection pads consisting of modified asphalt, reinforcements and fillers with a ceramic granule surface on both sides. They are durable, resilient and maintenance free.

DynaTred and DynaTred Plus can be installed over built-up and modified bitumen roofing systems to provide an integral, skid-resistant walkway for demanding service access needs.

Ceramic-Coated Roofing Granules: Specifically engineered for optimal embedment in the modified asphalt sheet. The ceramic coating promotes excellent long-term adhesion.

Easy Installation: Can be easily cut with a heavy-duty utility knife or circular saw with a carbide-tipped blade.

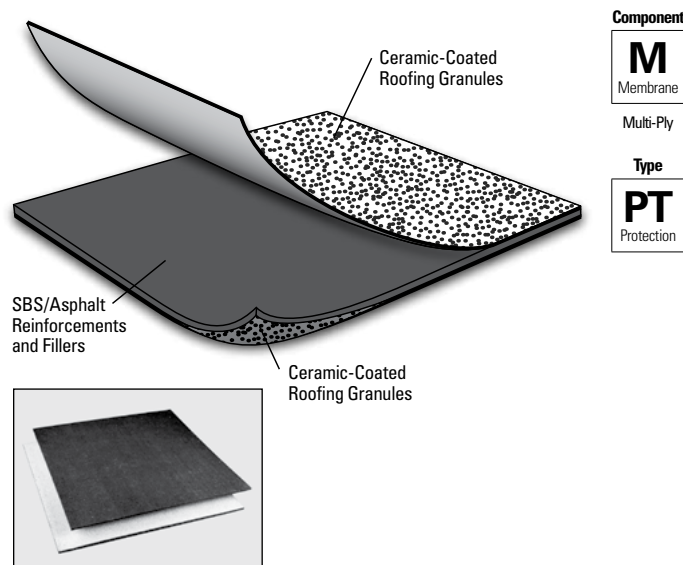

Colors: Available in either Black/White or White/White.

System Compatibility *This product may be used as a component in the following systems. Please reference product application for specific installation methods and information.*

Multi-Ply	BUR		APP		SBS			
	HA	CA	CA	HW	HA	CA	HW	SA
Compatible with all Multi-Ply systems								

Single Ply	TPO		PVC		EPDM	
	MF	FA	MF	FA	MF	BA
Do not use with Single Ply systems						

Key: HA = Hot Applied CA = Cold Applied HW = Heat Weldable SA = Self Adhered MF = Mechanically Fastened FA = Fully Adhered BA = Ballasted

Energy and the Environment

Pre-Consumer Recycled Content	0%
Post-Consumer Recycled Content	0%

Typical Physical Properties

Property	Result
Thickness	
DynaTred	¼" (6.35 mm)
DynaTred Plus	½" (8.47 mm)
Water Absorption	<0.5%

Product Application



- Over smooth or mineral-surfaced roofs, or prior to graveling, install DynaTred and DynaTred Plus in either a full bed of hot asphalt or MBR® Utility Cement. If installed in hot asphalt, use the same asphalt recommended for use with the BUR or modified bitumen membrane. All four corners of each piece should be fully and firmly set prior to walking on the board.
- Leave a minimum of 1" (2.54 cm) open space in all directions between walkway boards to provide for drainage of the roofing system.
- DynaTred and DynaTred Plus are not recommended for use on slopes in excess of 2" per foot (167 mm/m).

Packaging and Dimensions

Pad Coverage	7.11 ft ² (0.66 m ²)
Pad Length	32" (81.3 cm)
Pad Width	32" (81.3 cm)
Pads per Pallet	100