

Features and Components

ValuWeld G is used as a cap or flashing sheet in APP multi-ply roofing systems.

Ceramic-Coated Roofing Granules: Specifically engineered for optimal embedment in the APP-blended sheet. The ceramic coating promotes excellent long-term adhesion.


Standard granule colors are available in white and black. Additional colors are available in the Southwest and Pacific districts to include weathered wood, red, burnt sienna, chestnut, slate, tan and terra cotta. (Special colors may require extended lead times).

APP (Atactic Polypropylene) Polymer and Asphalt Blend:

Provides an extremely durable sheet with excellent weathering characteristics, flexibility and dimensional stability for ease of handling and quick installations.

Polyester Reinforcement Mat: Offers good tensile strength, toughness and puncture resistance and can accommodate stresses created by typical rooftop expansion and contraction forces.

Polyolefin Burn-Off Film: Promotes ease of heat welding.

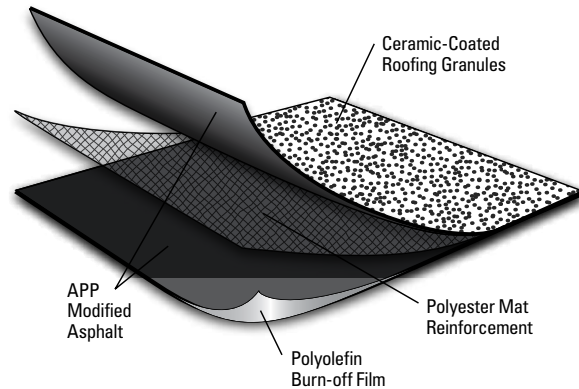

Component
M Membrane
Multi-Ply
Type
CS Cap Sheet
FL Flashing



Colors: White and Black are standard.

In the Southwest and Pacific, additional colors are available in weathered wood, red, burnt sienna, chestnut, slate, tan and terra cotta. (Special colors may require extended lead times).

System Compatibility *This product may be used as a component in the following systems. Please reference product application for specific installation methods and information.*

Multi-Ply	BUR		APP		SBS			
	HA	CA	CA	HW	HA	CA	HW	SA
Compatible with the selected Multi-Ply systems above								

Single Ply	TPO		PVC		EPDM		
	MF	FA	MF	FA	MF	FA	BA
Do not use in Single Ply systems							

Key: HA = Hot Applied CA = Cold Applied HW = Heat Weldable SA = Self Adhered MF = Mechanically Fastened FA = Fully Adhered BA = Ballasted

Energy and the Environment

Pre-consumer Recycled Content	0%
Post-consumer Recycled Content	0%

Peak Advantage® Guarantee Information

Systems	Guarantee Term
Dependent on system*	Up to 20 years

*Contact JM Technical Services for specific system requirements or guarantee terms.

Product Application



Heat Weld

Refer to JM APP modified bitumen specifications and detail drawings for application and slope information.

Packaging and Dimensions

Roll Width	39 3/8" (1 m)
Roll Length	32' 10" (10.01 m)
Roll Coverage*	95.8 ft² (8.9 m²)
Roll Weight	96 lb (44 kg)
Rolls per Pallet	20
Pallets per Truck**	22

*Assumes a 4" side lap.

** Assumes a 48' flatbed truck.