Manufactured in Frederick, MD, and Joplin, MO

TAMKO® NO. 15 UL felt features a tough
TAMKO organic felt (non-perforated) that is
saturated with asphalt.



USES

Accepted for use as an underlayment felt to be applied over the deck prior to the installation of TAMKO asphalt shingles.


CERTIFICATIONS

U.L. Built-Up Type 15 Label ASTM D 226, Type I

PRODUCT DATA*

Roll Dimensions Coverage per roll Laying Lines

*All values stated as nominal

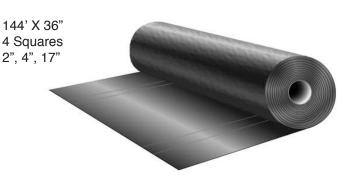

THIS PRODUCT IS SOLD "AS IS" WITHOUT WARRANTIES, EXPRESSED OR IMPLIED, INCLUDING THE IMPLIED WARRANTIES OF MERCHANTABILITY OR FITNESS FOR A PARTICULAR PURPOSE.

Visit our Web Site at tamko.com



TAMKO Logo, Rector Logo and TAMKO

TAMKO Logo, Roofer Logo and TAMKO® are registered trademarks of TAMKO® Building Products, Inc. Central District 220 West 4th St. Joplin, MO 64801 800-641-4691 Northeast District 4500 Tamko Dr. Frederick, MD 21701 800-368-2055 2300 35th St. Tuscaloosa, AL 35401 800-228-2656 Southeast District 7910 S. Central Exp. Southwest District Dallas, TX 75216 800-443-1834 Western District 5300 East 43rd Ave. Denver, CO 80216 800-530-8868

CAUTION: This product contains wood dust. Wood dust has been classified as a "known" human carcinogen by the International Agency for Pesearch on Cancer (IARG) and the National Toxicology Program. This product also contains oxidized asphalt. Occupational exposures to oxidized asphalt and its emissions during roofing have been classified by IARC as a "probable human carcinogen". Oxidized asphalt also contains Polycyclic Aromatic Hydrocarbons some of which have been classified by IARC as known or probable human carcinogens. The physical nature of this product may help limit any inhalation or dermal hazard during application and/or removal. However, physical forces such as sawing, grinding or drilling during demolition work and heating or burning may increase the inhalation or dermal exposure hazard of this product. Take precautions to prevent breathing and contact with skin.

Information included in this product data sheet was current at time of printing. To obtain a copy of the most current version of this product data sheet, visit us online at tamko.com or call us at 800-641-4691.